

Leclanché Capacitors  
48, av. de Grandson  
1400 Yverdon, Switzerland




Tel. +41 24 445 66 88  
Fax +41 24 445 66 89  
[capinfo@Lcap.ch](mailto:capinfo@Lcap.ch)  
[www.Lcap.ch](http://www.Lcap.ch)

Drawing No. : 1027425-53567

created from : 07/07/2014 11:34:00

**Part Number : GMXA68216050105**

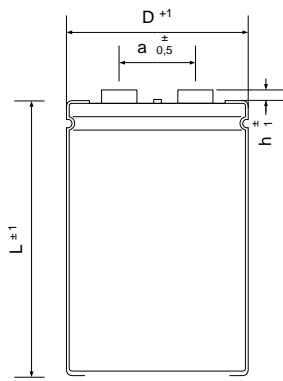

$\varnothing D$  : 50 mm  
 L : 105 mm  
 a : 22 mm  
 h : 4 mm  
 :  
 Terminals : M5

Electrical Parameter

Rated Capacitance ( $C_R$ ) @ 100 Hz / 20 °C	<b>6800</b> $\mu$ F	
Tolerance	<b><math>\pm 20</math></b> %	
Rated Voltage ( $U_R$ )	<b>160</b> V	
Surge Voltage ( $U_S$ ) max. 5 x 1 min / h	<b>184</b> V	
Reverse Voltage ( $U_U$ ) max. 1 s	<b>2</b> V	
Leakage Current ( $I_L$ ) @ $U_R$ / 5 min / 20 °C	<b>6582</b> $\mu$ A	
ESR typ. @ 100 Hz / 20°C	<b>16</b> m $\Omega$	
Tan $\delta$ typ. @ 100 Hz / 20°C	<b>7</b> %	
Z max. @ 10 kHz / 20°C	<b>13</b> m $\Omega$	
ESL typ.	<b>20</b> nH	
Rated Ripple Current ( $I_R$ ) @ 100 Hz / 85 °C	<b>7</b> A	
Useful life @ $I_R, U_R, 85$ °C	<b>12000</b> h	
IEC Climatic category / Standards	<b>40/085/56</b>	<b>IEC 60384-4</b>
Applications	General Industrial	
Your article No. / Project		