

Applications

- High DC voltage filtering
- PLCC systems, bypassing circuits
- Voltage dividers & multipliers
- HF signal coupling
- Pulses / Fast discharges

Main characteristics

- Compact size
- $U_T$  2x  $U_N$
- Polypropylene film-foil dielectric
- Lightweight
- Climatic category 40/070/21
- Low dielectric losses
- Low inductivity
- Compliant with SF6 environmental conditions

Execution

- Cylindrical, film-foil winding
- Insulated protective sleeve
- Axial connections with tinned copper wires
- Epoxy-resin end seal

Mounting

- Can be mounted in any position
- Recommended fastening with collar/insulated  
wires

**PPHF 100 Series**



1.0 Rated values and operational data :

	Nominal voltage $U_N$	[VDC]	10 k	
		[VAC]	707	50/60 Hz permanent
	Acceptable HF voltage	[ $\hat{V}$ ]	< 1000	20 Hz ... 500 kHz lowering see graph
	Test voltage $U_T$	[VDC]	20 k	1 min, 23 °C
		[VAC]	5 k	50 Hz, 10s
	Lightning voltage impulse	[ $\hat{V}$ ]	27 k	wave 1.2 / 50 $\mu$ s
	Lightning voltage impulse test( 1.2/50 $\mu$ s)		1 x +20 kV, then 5 x + 25kV, 1 x -20 kV, 5 x -25 kV 5 x + 20 kV, 5 x -20 kV (Truncated wave )	

2.0 Capacitance range


$C_n$ =>	100 pF							47 nF

3.0 Characteristics

				Min	Typ	Max
Dissipation factor	$\text{tg } \delta$	23 °C, 1 VAC	100 Hz 1 kHz 10 kHz 100 kHz 1 MHz			$5 \times 10^{-4}$ $5 \times 10^{-4}$ $5 \times 10^{-4}$ $10 \times 10^{-4}$ $14 \times 10^{-4}$
Insulation resistance	$R_i$	1 min, 500 VDC, 23°C	[GΩ]	100		
Self inductance	ESL		[nH/mm]			1
Temperature coefficient	$\alpha_c$	-40 ... +70°C	[ppm / °C]		-90±70	
Time stability	$\Delta C / C$	1 year	[%]			0.3± 0.4 pF
Humidity relative stability	$\Delta C / C$	50 ... 95 %HR	[%HR]			$0.6 \times 10^{-4}$
Climatic category	IEC60668-1	40/70/21				
Reliability / Time to failure		3200 VAC, 50Hz		> 30 min.		

4.0 Operating limits


Permissible HF voltage vs frequency

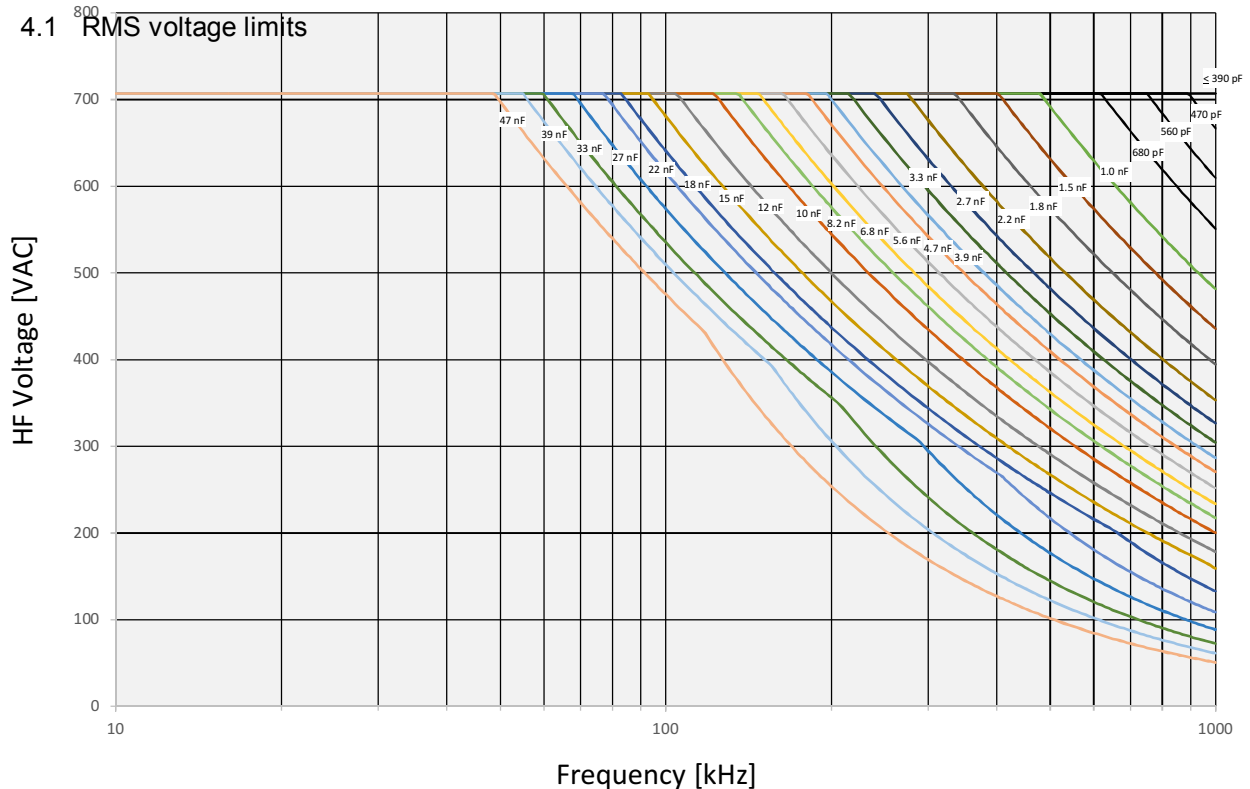


**Leclanché Capacitors for Critical Applications and Extreme Environments.**

Tel. +41 24 445 66 88 - Fax +41 24 445 66 89 capinfo@Lcap.ch www.Lcap.ch

4.2 Operational lifetime

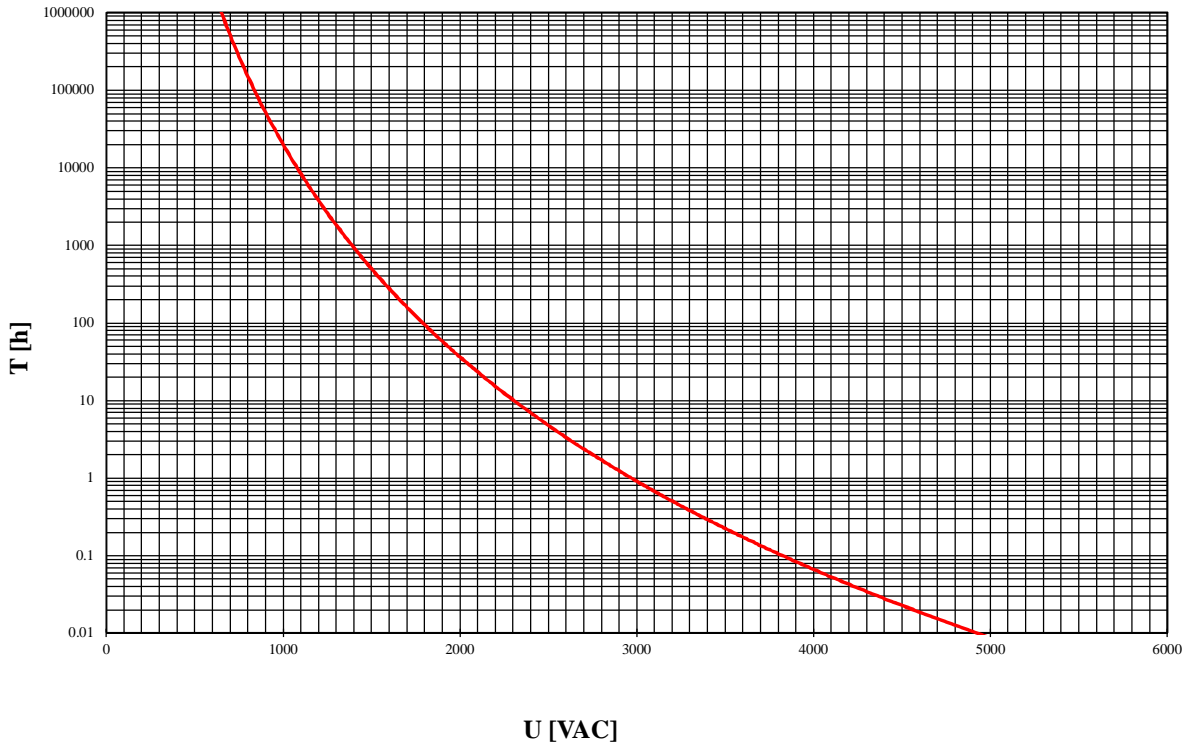

5.0 Dimensions, shape:

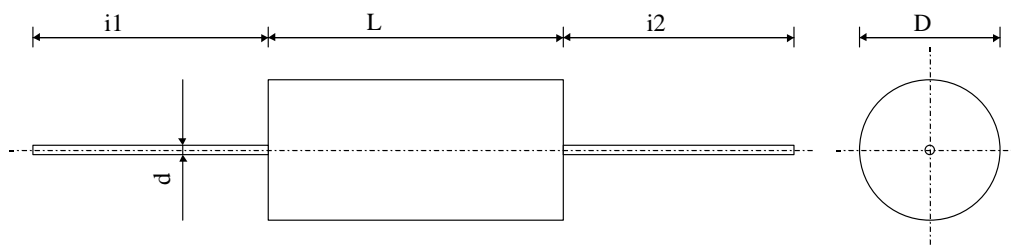

	d	i1, i2
Tinned copper wires	1.5 mm	≥ 60 mm

Capacitors delivered in bulk.

**Leclanché Capacitors for Critical Applications and Extreme Environments.**

Tel. +41 24 445 66 88 - Fax +41 24 445 66 89 capinfo@Lcap.ch www.Lcap.ch

B4F1 Pos.	Type	Cn	Dimension		tgδ	tgδ	tgδ	tgδ	tgδ
		[pF]	ø [mm]	L [mm]	1 kHz [E-4]	10 kHz [E-4]	100 kHz [E-4]	500 kHz [E-4]	1 MHz [E-4]
1	PPHF 100-310 d K	100	14,5	52,0	3.0	3.0	3.0	3.0	3.0
2	PPHF 100-312 d K	120	14,5	52,0	3.0	3.0	3.0	3.0	3.0
3	PPHF 100-315 d K	150	14,5	52,0	3.0	3.0	3.0	3.0	3.0
4	PPHF 100-318 d K	180	14,5	52,0	3.0	3.0	3.0	3.0	3.0
5	PPHF 100-322 d K	220	14,5	52,0	3.0	3.0	3.0	3.0	3.0
6	PPHF 100-327 d K	270	14,5	52,0	3.0	3.0	3.0	3.0	3.0
7	PPHF 100-333 d K	330	14,5	52,0	3.0	3.0	3.0	3.0	3.1
8	PPHF 100-339 d K	390	14,5	52,0	3.0	3.0	3.0	3.0	3.1
9	PPHF 100-347 d K	470	14,5	52,0	3.0	3.0	3.0	3.0	3.1
10	PPHF 100-356 d K	560	14,5	52,0	3.0	3.0	3.0	3.0	3.1
11	PPHF 100-368 d K	680	14,5	52,0	3.0	3.0	3.0	3.0	3.1
12	PPHF 100-382 d K	820	14,5	52,0	3.0	3.0	3.0	3.1	3.1
13	PPHF 100-210 d K	1.000	16,3	52,0	3.0	3.0	3.0	3.1	3.2
14	PPHF 100-212 d K	1.200	20,0	52,0	3.0	3.0	3.0	3.1	3.2
15	PPHF 100-215 d K	1.500	20,0	52,0	3.0	3.0	3.0	3.1	3.3
16	PPHF 100-218 d K	1.800	20,0	52,0	3.0	3.0	3.0	3.1	3.3
17	PPHF 100-222 d K	2.200	20,0	52,0	3.0	3.0	3.0	3.2	3.4
18	PPHF 100-227 d K	2.700	21,3	52,0	3.0	3.0	3.0	3.2	3.5
19	PPHF 100-233 d K	3.300	23,0	52,0	3.0	3.0	3.0	3.2	3.6
20	PPHF 100-239 d K	3.900	24,5	52,0	3.0	3.0	3.0	3.3	3.7
21	PPHF 100-247 d K	4.700	26,8	52,0	3.0	3.0	3.0	3.3	3.8
22	PPHF 100-256 d K	5.600	28,5	52,0	3.0	3.0	3.1	3.4	4.0
23	PPHF 100-268 d K	6.800	30,8	52,0	3.0	3.0	3.1	3.5	4.2
24	PPHF 100-282 d K	8.200	33,5	52,0	3.0	3.0	3.1	3.6	4.5
25	PPHF 100-110 d K	10.000	36,3	52,0	3.0	3.0	3.1	3.7	4.8
26	PPHF 100-112 d K	12.000	30,6	70,0	3.0	3.0	3.1	3.9	5.1
27	PPHF 100-115 d K	15.000	33,5	70,0	3.0	3.0	3.1	4.1	5.7
28	PPHF 100-118 d K	18.000	35,5	70,0	3.0	3.0	3.2	4.3	6.2
29	PPHF 100-122 d K	22.000	39,6	70,0	3.0	3.0	3.2	4.6	6.9
30	PPHF 100-127 d K	27.000	33,0	100,0	3.0	3.0	3.2	4.9	7.8
31	PPHF 100-133 d K	33.000	35,3	100,0	3.0	3.0	3.3	5.4	8.8
32	PPHF 100-139 d K	39.000	38,0	100,0	3.0	3.0	3.3	5.8	9.9
33	PPHF 100-147 d K	47.000	40,3	100,0	3.0	3.0	3.4	6.4	11.3

The last letter in the part number indicates the capacitance tolerance.

Available tolerances:

K = ±10%.

J = ± 5%

G = ±2%

F = ±1%