

Leclanché Capacitors
 48, av. de Grandson
 1400 Yverdon, Switzerland




Tel. +41 24 445 66 88
 Fax +41 24 445 66 89
capinfo@Lcap.ch
www.Lcap.ch

Drawing No. : 1011359-53567

created: hs 17/01/2014 10:27:00

Typ : EFA 350-3300 75145

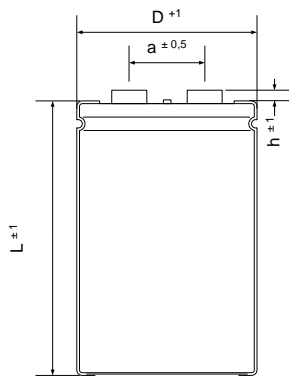

∅ D : 75 mm
 L : 145 mm
 a : 31,7 mm
 h : 5 mm

Terminals : M5

Printing:
 >LECLANCHE Logo<
 EFA
 350-3300 75145
 3300 µF -10+30%
 350VDC
 >Date Code<

Electrical Parameters

Rated Capacitance (C_R) @ 100 Hz / 20 °C	3300 µF	
Tolerance	-10 +30 %	
Rated Voltage (U_R)	350 V	
Surge Voltage (U_S) max. 5 x 1 min / h	385 V	
Reverse Voltage (U_U) max. 1 s	2 V	
Leakage Current (I_L) @ U_R / 5 min / 20 °C	6930 µA	
ESR typ. @ 100 Hz / 20°C	39 mΩ	
Tan δ typ. @ 100 Hz / 20°C	8 %	
Z max. @ 10 kHz / 20°C	31 mΩ	
ESL typ.	20 nH	
Rated Ripple Current (I_R) @ 100 Hz / OKT °C	7,5 A	30A @ 50°C / 200 Hz
Useful life @ I_R, U_R, OKT °C	8000 h	
IEC Climatic category / Standards	40/105/56	IEC 60384-4
Applications	General Industrial	
Your article No.. / Project		