


#6025

HIGH VOLTAGE METALLIZED CAPACITORS

PAM 20-075 uv K

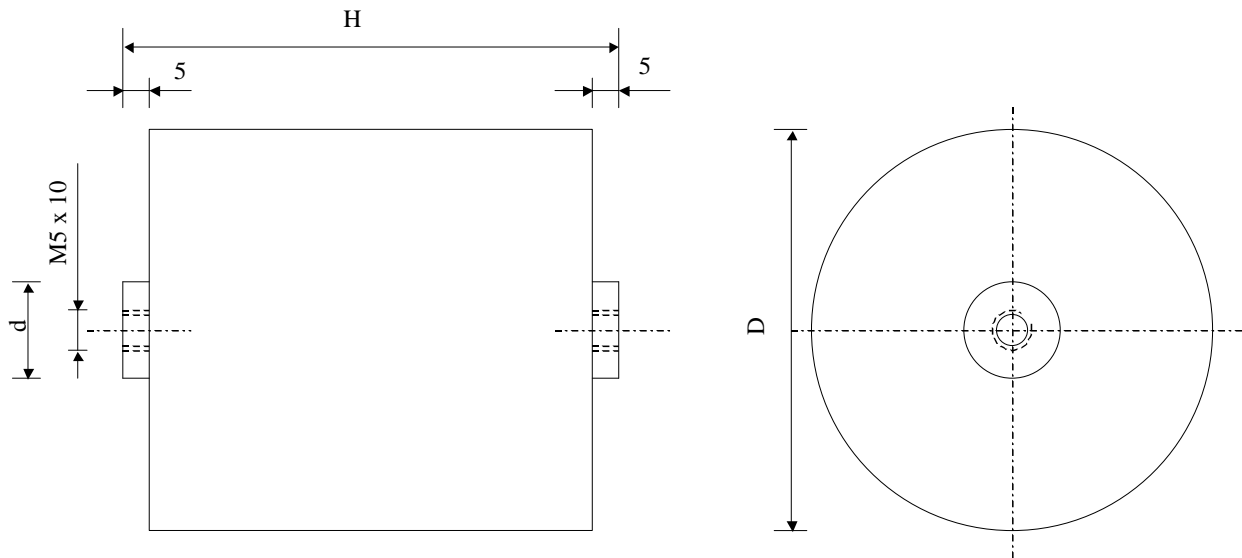

Dielectric of metallized polypropylene - Plastic tube

resin end sealing - Threaded outputs

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	0.75	μF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un AC	200	VRMS	
Tangent delta	$\text{tg}\delta$	5	10 ⁻⁴	1 V / 1 kHz
Equivalent series resistance	ESR	< 10.0	m Ω	1 V / 10 kHz
Stray inductance	ESL	< 55	nH	
Insulation resistance	Ri	> 100'000	M Ω	500 VDC - 1 min
Test voltage between terminals	U T1	700.00	VAC	50 Hz / 1 min
Lightning Impulse (1.2 / 50 μs)	V cr.	+ 1.6	kV	10 x
Lightning Impulse (1.2 / 50 μs)	V cr.	- 1.6	kV	10 x
Operating Temperature		-40 / +70	$^{\circ}\text{C}$	
Dimension	Symbol	Value	Unit	Conditions
Diameter	D	63	mm	
Height	H	62	mm	
Terminals				
Thread		M5 x 10	mm	
	$\varnothing d$	10	mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Lecdanché
Capacitors
A FISCHER & ZÄHRBECHER COMPANY

HJJ

www.Lcap.ch
 04.07.2011

capinfo@Lcap.ch
 faisab6025.XLS