


#6325

Discharge CAPACITORS

PPMF 2200-1143 uv K

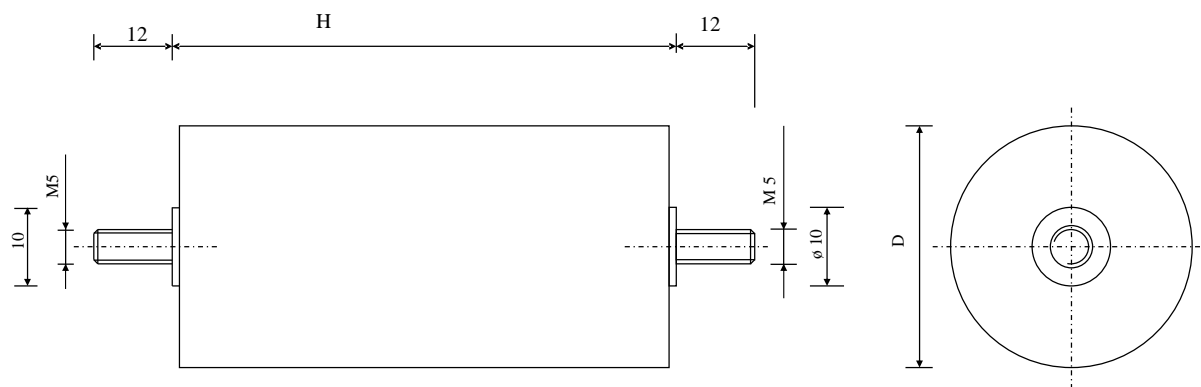

Dielectric of metallized polypropylene - Plastic tube

Polyurethane resin end sealing - Threaded outputs

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		0.0143	μF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un DC		22000	VDC	
Maximum Reverse Voltage	U inv.		80	%	
Maximum Peak current	I p		1200	A	
Maximum Repetition frequency	Fr		2	Hz	
Tangent delta	tg δ		≤ 6	10^{-4}	1 V / 1 kHz
Equivalent serie resistance	ESR		≤ 90	m Ω	100 kHz
Stray inductance	ESL		≤ 35	nH	
Insulation resistance	Ri		$> 100'000$	M Ω	500 VDC - 1 min
Test voltage between terminals	U T1		33000	VDC	1 min.
Estimated operational life (-5 %)			> 4 M	Discharges	22 kV / 1.2 kA

Dimension	Symbol		Unit	Conditions
Diameter	D		mm	
Height	H		mm	
Terminals				
Thread			mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TAUSSCH COMPANY

HJJ

www.Lcap.ch
 21.08.2014

capinfo@Lcap.ch
 faisab6325.XLS