


#5786

Metallized polypropylene capacitors

PPM 1000-025 r K

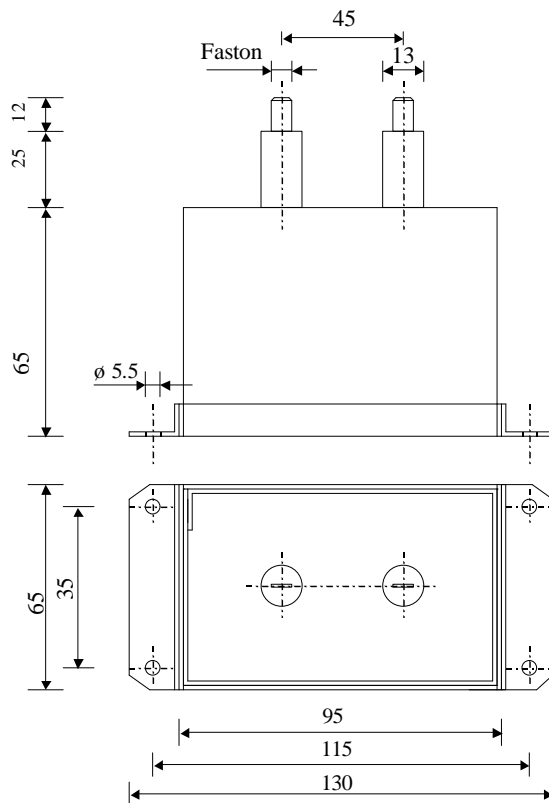

Dielectric of metallized polypropylene

FASTON outputs

Resin end sealing

Aluminium case thick 1.2 mm

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	0.25	$\mu\text{F}$	1 V / 1 kHz
Tolerance		$\pm 10$	%	
Rated voltage	Un DC	10'000	VDC	
Rated voltage	Un AC	2250	Veff	50 to 400 Hz
RMS Current	I <sub>eff</sub> max	7	A <sub>eff</sub>	10 kHz
slope of voltage variation	du/dt max.	700	V/ $\mu\text{sec}$	max. repetitive
Repetitive surge current	I <sub>cr.</sub> max	175	A	
Tangent delta	tg $\delta$	6	$10^{-4}$	1 V / 1 kHz
Equivalent serie resistance	ESR	$\leq 85$	m $\Omega$	10 kHz
Stray inductance	ESL	$\leq 200$	nH	
Insulation resistance	Ri x C	$> 20'000$	s	500 VDC - 1 min
Test voltage between terminals	U T1	20'000	VDC	10 s
Test voltage between terminals to case	U T2	20'000	VDC	10 s
Operating temp.		- 25 / + 70 °C		
Estimated operational life (-3%)		100'000	h	Un DC / 70°C
Dimension	Symbol		Unit	Conditions
Width	B	65	mm	
Length	L	95	mm	
Height	H	65	mm	
Terminals FASTON		6.3 x 0.8	mm	
Raster		45	mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon-les-Bains  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Le Janché**  
**Capacitors**  
A FISCHER & FANSCHE COMPANY

HJJ

23.02.2009

faisab5786.XLS