


#6316

POLYCARBONATE FILM CAPACITORS

CKM 16-3.3 df J

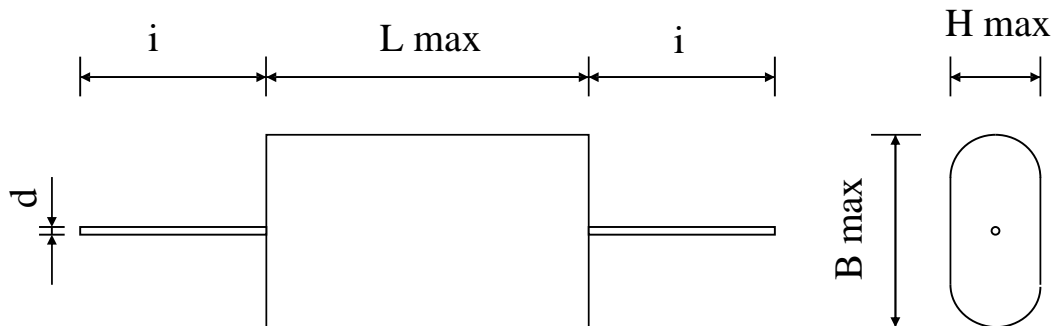

Dielectric of metallized polycarbonate

Polyester wrapped, Flammability UL 510 / Epoxy resin sealing UL 94-V0

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		3.3	μF	1 V / 1 kHz
Tolerance			± 5	%	
Rated voltage	Un DC		160	VDC	85°C
Rated voltage	Un AC		100	Veff	50 Hz - 85°C
slope of voltage variation	du/dt max.		9	V/ μsec	max. repetitive
Tangent delta	tg δ		≤ 30	10^{-4}	1 V / 1 kHz / 22°C
Stray inductance	ESL		≤ 30	nH	
Insulation resistance	Ri	25°C	> 3050	M Ω	100 VDC - 1 min
Test voltage between terminals	U T1		256	VDC	10 s
Operating temperature			- 55 ... + 125	°C	
Dimension	Symbol			Unit	Conditions
Width	B max		26	mm	
Height	H max		16	mm	
Length	L max		32.5	mm	
Terminals					
Axial tinned wire	d		$\varnothing 1.0$	mm	
	i		> 30	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TAUSSCHER COMPANY

HJJ

www.Lcap.ch
 11.07.2014

capinfo@Lcap.ch
 faisab6316.XLS