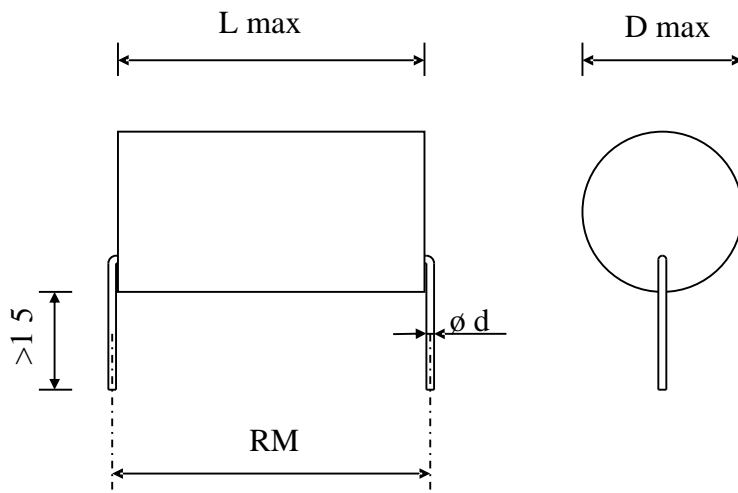


6318

FILM-FOIL CAPACITORS

TYPE
KT 250-210 da KPreliminary
Data sheetDielectrique polyester
Polyester wrapped / Epoxy resin sealing

Paramètre	Symbol	Value	Unit	Condition
Capacitance	C	1000	pF	20°C, 1 kHz
Tolérance		10	%	
Rated voltage	Un DC	2'500	VDC	
Rated temperature		85	°C	
Tangente delta	tg δ	$< 90 \times 10^{-4}$		1 V 1 kHz
Stray inductance	ESL	≤ 25	nH	
Insulation resistance	Ri	> 10000	M Ω	1000 VDC - 1 min
Lightning impulse voltage	Us	5	kV	1.2 / 50 μ s
Operating temperature		-25 / + 85 °C		
Dimension	Symbole		Unité	Conditions
Diameter	D max	9	mm	
Lenght	L max	16.5	mm	
Terminals				
Tinned wire	$\varnothing d$	0.6	mm	
	RM	17 ± 0.7	mm	
	M2			
	M1			
	MC			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Lecaniché
Capacitors
A FISCHER & TAUSCHER COMPANY

www.Lcap.ch
 HJJ 14.07.2014
 capinfo@Lcap.ch
 faisab6318.XLS