
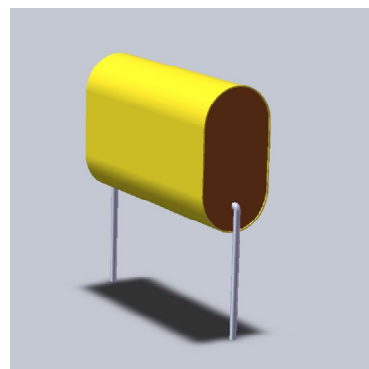


#6265

POLYPHENYLENE SULFIDE FILM CAPACITORS

MKS 40-1.0 dfv M

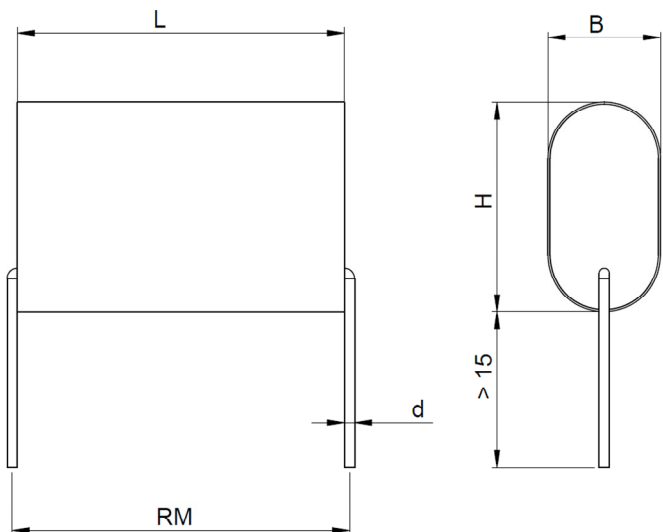

Dielectric of metallized polyphenylene sulfide

Polyester wrapped, Flammability UL 510 / Epoxy resin sealing UL 94-V0

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		1	$\mu\text{F}$	1 V / 1 kHz
Tolerance			$\pm 20$	%	
Rated voltage	Un DC		400	VDC	85°C
Rated voltage	Un AC		180	Veff	50 Hz - 85°C
Tangent delta	tg $\delta$		$\leq 10$	$10^{-4}$	1 V / 1 kHz / 22°C
Stray inductance	ESL		$\leq 30$	nH	
Insulation resistance	Ri	25°C	$> 10'000$	M $\Omega$	100 VDC - 1 min
Test voltage between terminals	U T1		640	VDC	5 s
Operating temperature			- 55 ... + 125	°C	
Dimension	Symbol			Unit	Conditions
Width	B max		11	mm	
Height	H max		20.5	mm	
Length	L max		32	mm	
Terminals					
Axial tinned wire	d		1	mm	
	RM		$33 \pm 1$	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Leclanché**  
**Capacitors**  
A FRICHER & TAUSSCHER COMPANY

HJJ

www.Lcap.ch  
 25.02.2014

capinfo@Lcap.ch  
 faisab6265.XLS