


#5584

Power Electronics Capacitors

MKT-4 50-15.0 a K

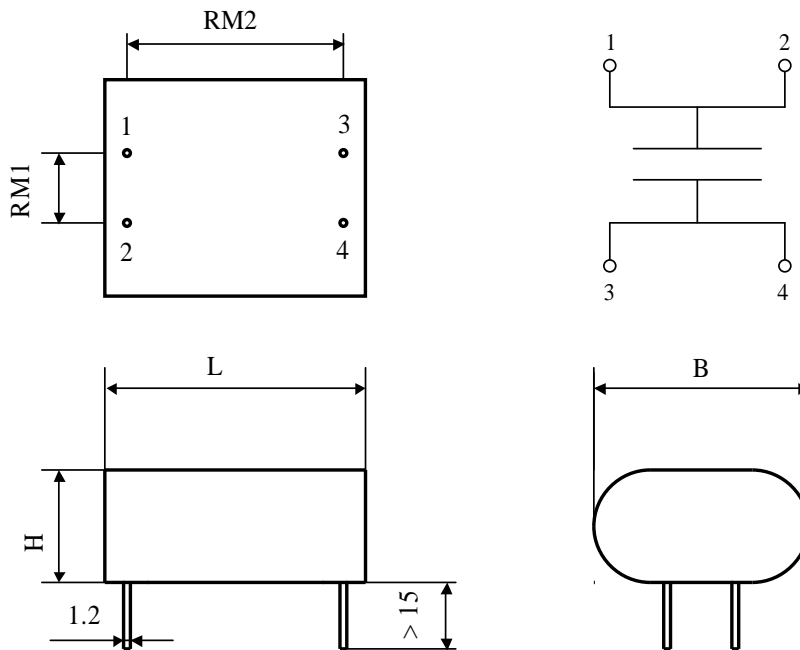

Dielectric : metallized polyester
Polyester wrapped

Epoxy resin sealing

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		15	μF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un DC		500	VDC	
Rated voltage	Un AC		160	Veff	50 Hz
RMS current	I RMS max.		5	Aeff	10 kHz / 90°C 1 min
Tangente delta	$\text{tg}\delta$		≤ 90	10^{-4}	1 kHz
Equivalent serie resistance	ESR		≤ 7.6	$\text{m}\Omega$	100 kHz
Stray inductance	ESL		≤ 15	nH	
Insulation resistance	Ri		> 670	$\text{M}\Omega$	100 VDC - 1 min
Test voltage between terminals	U T1		750	VDC	10 s
Climatic category			40/105/56		
Dimension	Symbol			Unit	Conditions
Width	B		32	mm	
Height	H		16	mm	
Length	L		45	mm	
Terminals					
Radial tinned wire	\varnothing		1.2	mm	
RM1			12.7 ± 0.5	mm	
RM2			40.64 ± 0.5	mm	
	M1				
	M0	15.08.2012	HJJ		
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon-les-Bains
Kondensatoren Tel.: ++41 24 445 66 88
Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TAUSSCHKE COMPANY

HJJ

www.Lcap.ch
11.07.2006

capinfo@Lcap.ch
faisab5584.XLS