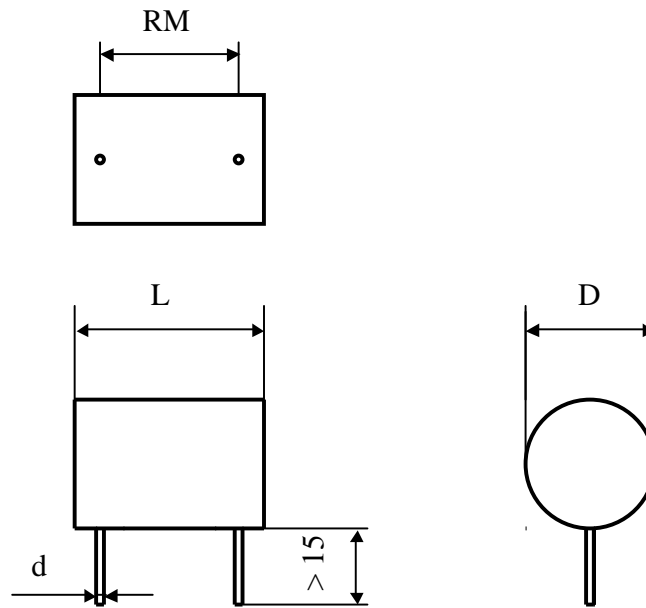


6206

FILM-FOIL CAPACITORS

TYPE
PA 25-047 gS (F)

Dielectrique polystyrene

Polyester wrapped / Epoxy resin sealing

Paramètre	Symbol	Value	Unit	Condition
Capacitance	C	470	nF	20°C, 1 kHz
Tolérance		1	%	
Rated voltage	Un DC	250	VDC	
Tangente delta	tgδ	$< 5 \times 10^{-4}$		1 V 1 kHz
Stray inductance	ESL	≤ 30	nH	
Insulation resistance	Ri	$> 100'000$	MΩ	100 VDC - 1 min
Test voltage between terminals	U T	500	VDC	10 s.
Operating temperature		- 40 / + 70	°C	

Dimension	Symbole	Value	Unité	Conditions
Diameter	D max	24	mm	
Lengt	L max	32 ± 0.5	mm	
Terminals				
Axial tinned wire	d	1	mm	
Raster	RM	27.5 ± 0.7	mm	

M2

M1

MC

Modification

Date

Visa émetteur

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TAUSSCH COMPANY

HJJ

www.Lcap.ch

03.07.2013

capinfo@Lcap.ch

faisab6206.XLS